



Heavy Duty Electric Tow Tractor

with capacities of 22,000 to 33,000lbs

The World of Hangcha



Appearance

- / Body choosing modern large circular arc streamline surface modeling, is in accordance with international design trend.

Reliability

- / The battery is dropped down to the lowest part of frame, this gives the tractor excellent stability because low center of gravity.

Comfort

- / Low noise, low shake, energy efficient, enviromental protection.
- / Low step and capacious room will be much appreciated by operator who have to get on and off.
- / Ergonomically design switch instrument and pedal. Adjustable steering wheel and seat ensure driver maximum comfortable and minimum fatigue.
- / Full hydraulic steering system, the steering is easy.
- / Large-capacity of the container making the operation more flexible and convenient.

Advance

- / New AC system provide more power, more precise performance of speed control, more safety and reliability, regenerative system.
- / High effective AC system prolong the working time.
- / Adopt the international first-class brand of LCD, with the battery indication, fault self-diagnosis table and accurately display in the harsh environment function.
- / Rich visual sense improve the productivity.
- / Exchange battery is easy because the design of side-exchange battery.

Advantage of AC System

- / Multiple benefits of the AC Power System include: fast response to operating commands, precise power control, regenerative system.
- / Economy of operation, resulting from minimized maintenance costs,e.g.
- / A high number of work cycles can be obtained from each battery charge due to the efficiency of the system of energy control.
- / System is fully adjustable to suit the load, working area and operator. Inbuilt diagnostics record intermittent faults and service requirements reducing expensive service time.

Easy Maintenance

- / You can open and close the battery cover hood for daily checkup the battery, motor and controller. It's easy to access inner of battery cover for maintenance.

Standard Specification

- / Head lamp
- / Turning lamp
- / Rear combined LED
- / Horn
- / Emergency disconnect switch
- / Inching function
- / AC Power System
- / Standard battery
- / Large LCD display
- / Air pneumatic tire

Options

- / Solid pneumatic tires
- / High capacity import battery
- / Simple cabin
- / Closed cabin
- / Suspension seat
- / Mirror
- / Warning lamp
- / Charger
- / Customer painting
- / Height of tractor pin



Forward/Reverse inching switch and emergency switch are mounted on the left rear, them make the hook easy and safe



The large internal space is easy for maintenance





Battery side extraction design is convenient for changing battery



The battery cover can be fully opened, the design is easy for maintenance

22,000~33,000lb Electric Tow Tractor

| | | HANGCHA GROUP CO.,LTD. | | | | | |
|----------------------|------|---|-------------------------|-------------|-------------|------------|-----------|
| Distinguishing marks | 1.1 | Manufacturer | | | | | |
| | 1.2 | Manufacturer's type designation | QSD10-C1 | | QSD15-C1 | | |
| | 1.4 | Operator type: hand, pedestrian, standing, seated, order-picker | Seated | | Seated | | |
| | 1.5 | Rated capacity/rated load | Q (kg/lb) | 10000/22000 | 15000/33000 | | |
| | 1.7 | Rated drawbar pull | F (N/lbf) | 2500/562 | 3750/843 | | |
| | 1.9 | Wheelbase | y (mm/in) | 1200/47.2 | 1400/55.1 | | |
| Weight | 2.1 | Service Weight | kg/lb | 2200/4850 | 2450/5400 | | |
| Tyres, chassis | 3.2 | Tyre size, front | 5.0-8 | | | | |
| | 3.3 | Tyre size, rear | 6.0-9 | | | | |
| | 3.5 | Wheels, number front / rear (x = driven wheels) | 2/2 | | | | |
| | 3.6 | Tread, front | b ₁₀ (mm/in) | 897.5/35.3 | 897.5/35.3 | | |
| | 3.7 | Tread, rear | b ₁₁ (mm/in) | 908/35.7 | 908/35.7 | | |
| Dimensions | 4.7 | Height of overhead guard (cabin) | h ₆ (mm/in) | 1440/56.7 | 2112/83.1 | 1440/56.7 | 2112/83.1 |
| | 4.12 | Coupling height | h ₁₀ (mm/in) | 350/450 | 13.8/17.7 | 350/450 | 13.8/17.7 |
| | 4.19 | Overall length | l ₁ (mm/in) | 2122/83.5 | | 2322/91.4 | |
| | 4.21 | Overall width | b ₁ (mm/in) | 1100/43.3 | | 1100/43.3 | |
| | 4.32 | Ground clearance, centre of wheelbase | m ₂ (mm/in) | 100/4 | | 100/4 | |
| | 4.35 | Turning radius | W _a (mm/in) | 1985/78.1 | | 2170/85.4 | |
| Performance Data | 5.1 | Travel speed, laden/unladen | kph / mph | 10/18 | 6.2/11.2 | 10/18 | 6.2/11.2 |
| | 5.5 | Drawbar pull at 60 minute rating | N/lbf | 2500/562 | | 3750/843 | |
| | 5.6 | Max. Drawbar pull at 5 minute rating | N/lbf | 8000/1798 | | 11000/2473 | |
| | 5.7 | Gradeability, laden/unladen | % | - / 25 | | - / 25 | |
| Electric-engine | 6.1 | Drive motor rating S2 60 min | kW/hp | 6.8/9.1 | | 11.75/15.8 | |
| | 6.4 | Battery voltage, nominal capacity K5 | V/Ah | 48/420 | | 80/450 | |
| Others | 8.1 | Type of drive control | | Curtis | | Curtis | |

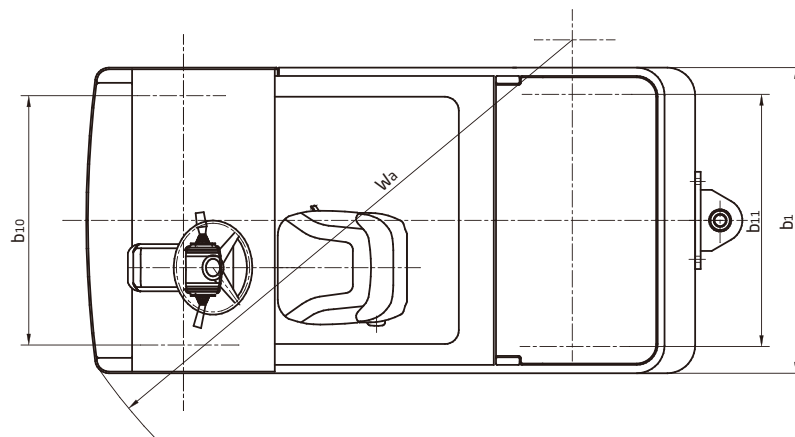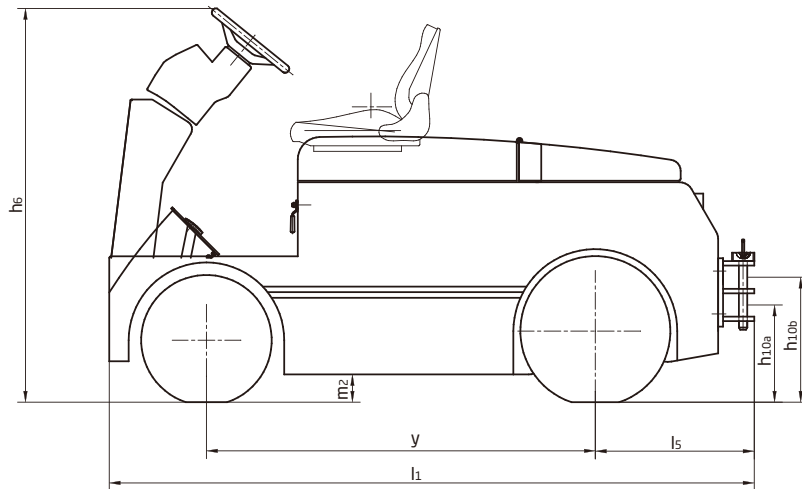



HC FORKLIFT AMERICA CORPORATION

Company address:

10405-A Granite Street Charlotte,
NC 28273

Toll Free: 888-652-8395

Phone: 980-888-8335

Fax: 980-888-8336

america@hcforklift.com
www.hcforkliftamerica.com



Follow us on
Facebook



Follow us on
YouTube



Follow us on
WeChat

HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.